

# Northumbria Research Link

Citation: Paudel, Rupak, Le Minh, Hoa, Ghassemlooy, Zabih and Rajbhandari, Sujan (2010) High speed short range optical wireless ground-to-train communications. In: The 11th Annual Postgraduate Symposium on the Convergence of Telecommunications, Networking and Broadcasting (PGNet), 21-22 June 2010, Liverpool John Moores University, Liverpool.

URL:

This version was downloaded from Northumbria Research Link:  
<http://nrl.northumbria.ac.uk/id/eprint/1229/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)



**Northumbria  
University**  
NEWCASTLE



**UniversityLibrary**

# High Speed Short Range Optical Wireless Ground-to-Train Communications

Rupak Paudel, Hoa Le Minh, Zabih Ghassemlooy and Sujan Rajbhandari

*Optical Communications Research Group, Northumbria University*

*Newcastle upon Tyne, NE1 8ST, UK*

{rupak.paudel, hoa.le-minh, z.ghassemlooy, sujan.rajbhandari}@northumbria.ac.uk

**Abstract**— There is a huge demand for seamless high-speed communications in fast moving trains. People want broadband services while on board as in their home or in the workplace. This demand drives the motivation for a high speed dedicated optical wireless link. Here we propose a free space optical ground-to-train communications system which consists of optical transceivers placed on the train and along the railway track. A mathematical model for three different scenarios when the train is moving has been developed. The optical link analysis, results as well as a simple proof of concept are also presented.

**Index Terms**—wireless communications, optical wireless communications, ground-to-train communications.

## I. INTRODUCTION

FREE-SPACE optical (FSO) communication is a cost effective and license free data access technique that is gaining huge popularity over the last few years [1]. FSO systems offer wider modulation bandwidth that can achieve very high data rates (in excess of Gb/s) and immunity to electromagnetic interference compared to the radio frequency (RF) counterparts [1-3]. The main drawback of FSO is the limitation of permitted transmit power due to the eye safety regulations, ambient light interference from both artificial and natural light sources and limited mobility [4].

Application of FSO communications can vary from short range (within few meters) in indoor environment to a longer length (in excess of 500 m) at outdoor. Outdoor links up to a range of a few kilometres have been reported where the data transmission rate could reach up to several Gbit/s [5]. Whereas the emerging short range and indoor optical wireless communications (OWC) could provide hundreds of Mbit/s over several meters for home wireless network access [6]. In both types of applications transmitter and receiver are almost stationary, or have a low degree of mobility.

Applications of FSO communications on mobile terminals are interesting but very challenging due to the nature of narrow field-of-view (FOV) of the system, which is also bounded by the limited transmit power. Traffic light and car-to-car communications are under development and testing [7] whereas high-mobility ground-to-train FSO communications is emerging as an interesting but very challenging topic. Different studies [8-10] have shown that there is a demand for the use of high bandwidth applications in a moving train which in turn, requires high speed data connection. At present,

passengers on a moving train demand data connection services with the same quality as in home or at their workplace environment. According to [11], most of the business travelers work on trains and would use wireless broadband services if it was available. Therefore there is a requirement of high speed data transmission between train and base stations (BS) to ensure seamless data services for all the passengers. Various works [12]-[16] have been done in order to provide seamless wireless internet connections in a fast moving train. Although RF based communication is a promising technology for fixed wireless local area network (WLAN), its effectiveness is limited when the nodes are moving at very high speeds which motivates the interest in using FSO as a possible means of communication for high speed trains.

FSO technology can be used for high speed communications due to the unlimited bandwidth available at optical wavelengths. Also, the optical transmitters such as lasers and LEDs can support high data rate [17]. Some work [18, 19] regarding ground-to-train communications using FSO has illustrated a huge potential as of yet unexplored.

OWCs may be either infrared (IR) communications or visible light communications (VLC). Most of the optical wireless systems are designed to operate in the near-IR wavelength of around 850 nm. This is mainly due to the safety issues and the availability of low cost optical components [3].

The use of white LED in VLC systems is further supported by [20] where an experimental demonstration using 16 LEDs in the transmitter acquires a bandwidth of 25 MHz and data rate of 40 Mb/s along with the illumination in the room for lighting purpose. Data rates as high as 100 Mb/s can be achieved with low bit error rate (BER) using on-off-keying (OOK) non-return-to-zero (NRZ) modulation [21]. Siemens [22] has reported 200 Mb/s VLC and in some scenarios, the data rate could reach 500 Mb/s. However, LEDs have low modulation bandwidth limiting the transmission speed whilst in motion. Hence, IR communications using laser diodes (LD) can be used for high speed applications in fast moving trains. However, the transmitted power is restricted due to the safety regulations [3].

In this paper, the mathematical modeling of a single link FSO communications for the train system, optical link budget calculations and initial practical results are presented. The paper is organised as follows. Section II explains the different scenarios of ground-to-train communication system, section III presents the link budget calculations for the link, section IV

Among the multiple receivers, the power level comparison between the received signals can be performed and different combination rules like maximum ratio combining (MRC), equal gain combining (EGC), and selection combining (SC) can be used for optimum performance.

### C. Multiple transmitters and multiple receivers (MIMO – multiple input multiple output)

MIMO can be used in the system for bidirectional parallel data transmission in order to improve the link capacity. The main challenge with the high-mobility MIMO system is updating of the channel matrix. The transmission rate achieved in this case could be in the range of Gbits/sec [23]. For the MIMO configuration, there would be many BSs and they would communicate with multiple receivers on the train. The criteria for the BS can be approximated as

$$L_{BS-MIMO} = \frac{L_{BS-SISO}}{M}, \quad (11)$$

where,  $M$  is the number of parallel links,  $L_{BS-MIMO}$  is the separation between consecutive BSs in MIMO case.

Since SISO and MIMO are out of the scope of this paper, the link budget for the SISO configuration is analysed in the following section.

### III. LINK BUDGET CALCULATIONS

The link budget calculations and the coverage area for the SISO configuration can be estimated as given by [24], which can be used to estimate the required transmitted power for various link lengths.

$P_{Tx}$  is the optical transmitted power emitted from the transmitter that is located at various BSs which incidents on the photodetector (PD) having collection area  $A_{det}$  positioned on the roof of the train cars (see Fig. 2). Considering a transmitter half angle of  $\theta$ , the beam radius  $R$  and coverage area  $A$  at a distance  $L$  from the transmitter is given by;

$$R = L \tan(\theta). \quad (12)$$

$$A = \pi R^2. \quad (13)$$

To increase the collection area at the receiver, an optical telescope (lens) can be incorporated at the receiver (see Fig. 3). Hence the collection area of the receiver  $A_{coll}$  is given by

$$A_{coll} = \pi(R_{coll})^2. \quad (14)$$

where  $R_{coll}$  is the radius of the concentration lens, which is used to achieve the optical gain.

The use of an optical concentration lens can significantly improve the optical gain and reduce the transmit power but at the cost of a narrower FOV as given by the constant radiance theorem [24]:

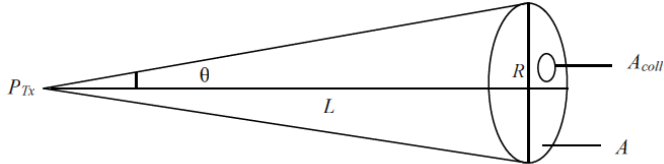


Fig. 2: Transmitted beam from the transmitter to the receiver

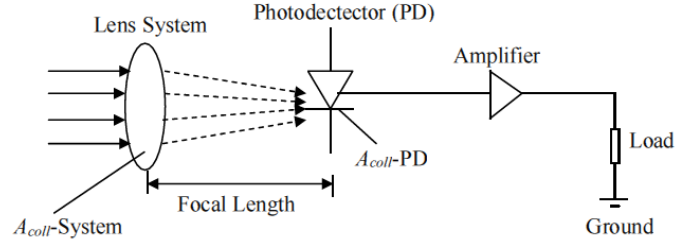


Fig. 3: Use of an optical concentration lens system.

$$A_{coll} \sin\left(\frac{FOV}{2}\right) \leq A_{det}. \quad (15)$$

For a truly diffuse system, the power received by the detector is set by the detector area. The resulting FOVs of the receiver obtained using (15) are given in Table 1 which shows that the FOV is reduced as the diameter of the lens is increased. Hence there is a trade-off between the optical gain and the FOV.

### IV. NUMERICAL RESULTS

To evaluate the appropriate transmit power required for the communication link, Matlab simulations have been performed with the system parameters given in Table I. The optical transmit power versus the link length is shown in Fig. 4 which clearly demonstrates that as the link length increase, the required optical transmitted power increases.

TABLE I  
SIMULATION PARAMETERS

Parameters	Value				
Receiver Sensitivity	-30 dBm				
FOV of transmitter	$\pm 6^\circ$				
FOV of photodetector	$\pm 60^\circ$				
Radiant sensing area of the receiver $A_{det}$	4.84 mm <sup>2</sup>				
Diameter of the concentration lens (mm)	10	15	20	25	30
FOV of the receiver (calculated using (15))(degree)	28.7	19.1	14.3	11.4	9.5

In this analysis, a number of commercially available concentration lens with different sizes are investigated. For a fixed link length, the required transmit power reduces significantly with increasing lens radius. As the lens radius increase, the optical gain per increment in radius decreases. For example, at a link length of 10 m, there is a reduction of  $\sim 14$  dBm of transmitted power when  $R_{coll}$  is increased from 5 mm to 7.5 mm, however there is only  $\sim 3$  dBm reduction in the transmitted optical power when  $R_{coll}$  is increased from 12.5 mm to 15 mm. Hence, optimisation between the link length, size of optical concentrator and the transmitted power is obligatory for a safe and reliable transmission of data for various lengths along the rail-track.

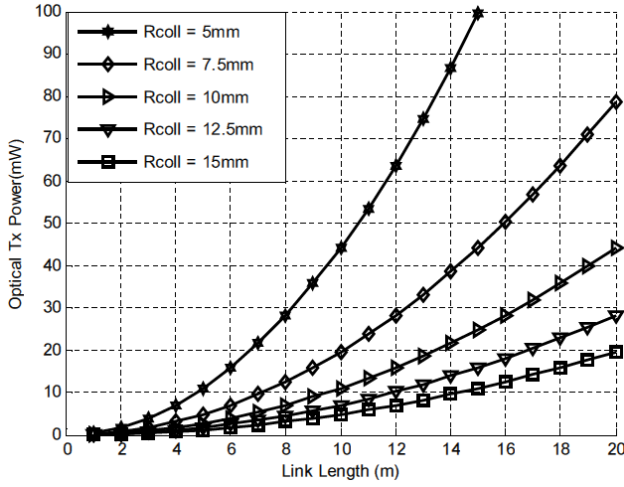


Fig. 4: Plot of required optical transmit power versus the link length for a range of the concentration lens radius.

## V. EXPERIMENT SETUP AND RESULTS

An experimental FSO link was set-up in the laboratory as a first step towards the implementation of the system. Fig. 5 shows the block diagram of the link setup. The laser is driven by a pseudo-random bit sequence (PRBS) source at 20 Mbit/s with OOK-NRZ modulation. The receiver front-end consists of a PD (SFH 225 FA) followed by transimpedance amplifier (TIA) IC (AD8015). The output of TIA is connected to oscilloscope for visual display of received signal.

TABLE II

EXPERIMENT SET UP PARAMETERS OF LD, PD AND TIA.

Parameters		Value
Laser Diode (LD)	Peak Wavelength	830 nm
	Maximum optical power	10 mW
	Class	IIIB
	Beam size at aperture	5 mm by 2 mm
PIN Photodiode (PD)	Wavelength of maximum sensitivity	900 nm
	Spectral range of sensitivity	740-1120 nm
	Active Area	4.84 mm <sup>2</sup>
	Half Angle (FOV)	±60°
	Responsivity	0.63 A/W
	Rise and fall time of the photocurrent	20 ns
Transimpedance Amplifier (TIA)	Bandwidth (3 dB)	240 MHz
	Rise and Fall Time	1.5 ns
	Supply Voltage	5 V
	Optical Sensitivity	-36 dBm
	Output Impedance	50 Ω
	Maximum Input Current	10 mA

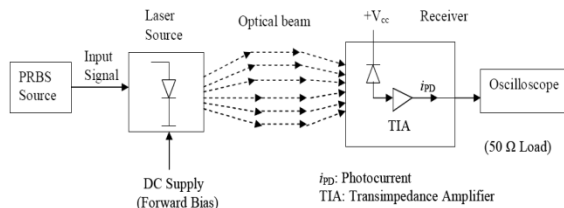


Fig. 5: Experimental link setup.

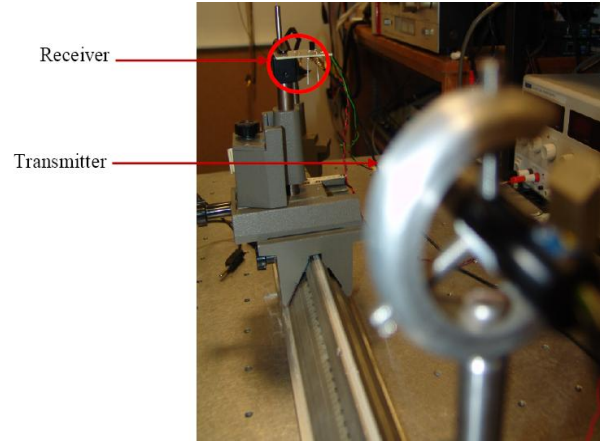


Fig. 6: Photograph of the optical wireless link.

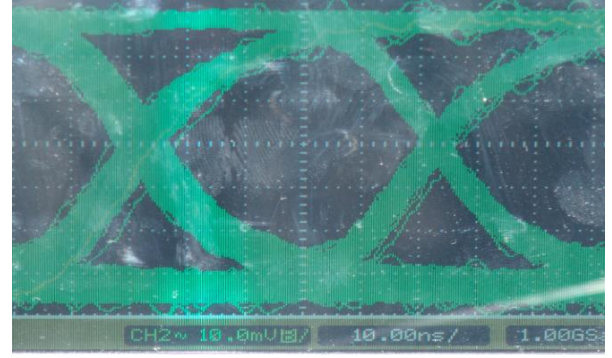


Fig. 7: The eye-diagram of the received signal.

The picture of the optical link setup is shown in Fig. 6 with the transmitter and receiver as shown.

The eye diagram for the optical link at a link length of 30 cm is shown in Fig. 7. The clear and wide opening of eye width for a data rate of 20 Mbit/s shows the possibility of error-free transmission of data. The link could perform at higher data rates as the bandwidth of transmitter and receiver are well above 20 MHz. In this experiment we limit the data rate at 20 Mbit/s due to the availability of high-speed data source. A longer link could be achieved by using concentration lens at the receiver. The full duplex communication link demonstration of such a system at higher data rates is in the development stage and results will be disseminated in future publications.

## VI. CONCLUSION

In this paper, we have proposed a ground-to-train communications based on the optical wireless scheme. Mathematical modelling and link budget calculation was presented for different communications models and a set of operation criterion were also determined. The results obtained have suggested that several meters long link could be implemented within the allowed eye-safe margin if the receiver collection area is sufficiently large using an optical system. A practical demonstration of the link has been presented for a SISO system. Though the link operates over a

relatively short range, the concept developed is applicable to systems with longer ranges, which is currently under study.

## VII. ACKNOWLEDGEMENT

One of the authors (R Paudel) would like to acknowledge the financial support received from the School of Computing, Engineering and Information Sciences at Northumbria University.

## REFERENCES

- [1] J. V. Paraskevopoulos, S. H. Voss, and K. D. Langer, "Optical free space communication systems in the Mbps to Gbps range, suitable for industrial applications," in *International Symposium on Optomechatronic Technologies*, 2009, pp. 377-382.
- [2] A. Mahdy and J. S. Deogun, "Wireless optical communications: a survey," in *Wireless Communications and Networking Conference*, 2004, pp. 2399-2404 Vol.4.
- [3] K. D. Langer and J. Grubor, "Recent developments in optical wireless communications using infrared and visible Light," in *9th International Conference on Transparent Optical Networks*, 2007, pp. 146-151.
- [4] J. M. Kahn and J. R. Barry, "Wireless infrared communications," *Proceedings of the IEEE*, vol. 85, pp. 265-298, 1997.
- [5] P. L. Chen, S. T. Chang, S. T. Ji, S. C. Lin, H. H. Lin, H. L. Tsay, P. H. Huang, W. C. Chiang, W. C. Lin, S. L. Lee, H. W. Tsao, J. P. Wu, and J. Wu, "Demonstration of 16 channels 10 Gb/s WDM free space transmission over 2.16 km," in *Digest of the IEEE/LEOS Summer Topical Meetings* 2008, pp. 235-236.
- [6] J. P. Javaudin, M. Bellec, D. Varoutas, and V. Suraci, "OMEGA ICT project: Towards convergent Gigabit home networks," in *IEEE 19th International Symposium on Personal, Indoor and Mobile Radio Communications*, 2008, pp. 1-5.
- [7] S. Iwasaki, M. Wada, T. Endo, T. Fujii, and M. Tanimoto, "Basic experiments on parallel wireless optical communication for ITS," in *IEEE Intelligent Vehicles Symposium*, 2007, pp. 321-326.
- [8] A. Gumaste, N. Ghani, and Z. Si Qing, "Light-trains: A cross-layer delivery mechanism for high bandwidth applications in moving metro-trains," in *IEEE International Conference on Communications*, 2006, pp. 2648-2654.
- [9] A. Shimura, Y. Sugawara, S. Haruyama, M. Nakagawa, H. Suzuki, A. Kondo, T. Ishigure, and Y. Koike, "Train communication system using graded-index leaky plastic optical fiber," in *IEEE International Conference on Industrial Technology*, 2004, pp. 78-83 Vol. 1.
- [10] E. Masson, M. Chennaoui, M. Berbineau, and H. Dumortier, "Performance of high data rate transmission scheme developed for train communications," in *7th International Conference on ITS Telecommunications*, 2007, pp. 1-6.
- [11] K. R. Kumar, P. Angolkar, D. Das, and R. Ramalingam, "SWiFT: A novel architecture for seamless wireless internet for fast trains," in *Vehicular Technology Conference* 2008, pp. 3011-3015.
- [12] M. Minli Zhou, "Principle, technology and challenge of radio over fiber (RoF) based broadband access for metro and intercity trains," in *Communications and Photonics conference and Exhibition*, 2009, pp. 1-10.
- [13] N. Kita, T. Ito, S. Yokoyama, T. Ming-Chien, Y. Sagawa, M. Ogasawara, and M. Nakatsugawa, "Experimental study of propagation characteristics for wireless communications in high-speed train cars," in *3rd European Conference on Antennas and Propagation*, 2009, pp. 897-901.
- [14] B. Chow, Y. Ming-Li, M. Sauer, A. Ng'Oma, T. Ming-Chien, and Y. Chien-Hung, "Radio-over-fiber distributed antenna system for WiMAX bullet train field trial," in *Mobile WiMAX Symposium*, 2009, pp. 98-101.
- [15] I. Ahmad and D. Habibi, "A novel mobile WiMAX solution for higher throughput," in *16th IEEE International Conference on Networks*, 2008, pp. 1-5.
- [16] E. Perera, H. Petander, and A. Seneviratne, "Bandwidth fuelling for network mobility," in *International Conference on Wireless and Optical Communications Networks*, 2006, pp.1-5.
- [17] T. Komine and M. Nakagawa, "Integrated system of white LED visible light communication and power-line communication," in *IEEE Transactions on Consumer Electronics*, vol. 49, no.1, pp.71-79, 2003.
- [18] H. Kotake, S. Haruyama, M. Nakagawa, and K. Seki, "BER characteristic of ground-to-train communication system using free-space optics technology," in *9th International Conference on Transparent Optical Networks*, 2007, pp. 165-169.
- [19] M. Hiruta, M. Nakagawa, S. Haruyama, and S. Ishikawa, "A study on optical wireless train communication system using mobile object tracking technique," in *11th International Conference on Advanced Communication Technology* 2009, pp. 35-40.
- [20] H. L. Minh, D. O'Brien, G. Faulkner, L. Zeng, K. Lee, D. Jung, and Y. Oh, "High-speed visible light communications using multiple-resonant equalization," *IEEE Photonics Technology Letters*, vol. 20, pp. 1243-1245, 2008.
- [21] H. L. Minh, D. O'Brien, G. Faulkner, L. Zeng, K. Lee, D. Jung, Y. Oh, and E. T. Won, "100-Mb/s NRZ Visible Light Communications Using a Postequalized White LED," *IEEE Photonics Technology Letters*, vol. 21, pp. 1063-1065, 2009.
- [22] "Siemens Visible Light Communication."  
[http://www.siemens.com/innovation/en/news\\_events/ct\\_pressreleases/e\\_research\\_news/2010/e\\_22\\_resnews\\_1002\\_1.htm](http://www.siemens.com/innovation/en/news_events/ct_pressreleases/e_research_news/2010/e_22_resnews_1002_1.htm)
- [23] L. B. Zeng, D. C. O'Brien, H. Le-Minh, G. E. Faulkner, K. Lee, D. Jung, Y. Oh, and E. T. Won, "High data rate multiple input multiple output (MIMO) optical wireless communications using white LED lighting," *IEEE Journal on Selected Areas in Communications*, vol. 27, pp. 1654-1662, 2009.
- [24] D. C. O'Brien and M. Katz, "Short-Range Optical Wireless Communications", *Wireless World Research Forum*.  
<http://cictr.ee.psu.edu/research/wc/Short-range-OW.pdf>